

H-100

LCV



The H-100.

The H-100 is the ultimate solution for any big or small business. It is tough, compact, practical and highly versatile, with a 1,3 ton payload and crew capability that takes this light truck to another level.



Driver-orientated console



Comfortable 3-seater

Comfort and control is the name of the game with an extra seat and shoulder-width for ease of movement, a driver-centric console and clever storage spaces.

Specifications

	H-100
	Diesel
Engine	2.6 D Euro II
Bore x stroke (mm)	91,1 x 100
Compression ratio	22 : 1
Max. power (kW/rpm)	58/3 800
Max. torque (Nm/rpm)	167/2 200
Valve system	Single overhead camshaft, 2 valves/cylinder
Fuel system	Min-max type governor, Bosch type injection pump
Fuel tank (L)	65
Fuel consumption (European testing)	
Combined cycle litres/100 km	10,2
Suspension	
Front	Double wishbone & torsion bar with 25 mm stabilizer bar
Rear	Semi-elliptic laminated leaf springs
Load capacity	
Payload	1 335 kg
Load area	4 539 mm ²
Maximum towing weight	1 250 kg
Steering	
Type	Rack & pinion with collapsible universal joint & column
Minimum turning radius (m)	5,04
Wheels & tyres	
Wheel	Steel rim 6,0J x 15"
Tyre	195/70 R15 C-8PR
Spare tyre	Full size steel rim
Brakes	
Front (mm)	274 mm ventilated disc
Rear (mm)	260 mm solid drum
Brake booster	8 + 9" tandem
Load sensing proportioning valve	Standard
Fitments	
Manual aircon	Optional
Load deck/tipper conversion	Optional
Warranty & maintenance	
Manufacturers warranty	5 year/150 000 km manufacturer's warranty Additional 2 Year/50 000 km manufacturer's powertrain warranty
Roadside assistance	7 year/150 000 km
Service plan	3 year/60 000 km
Service intervals	10 000 km
Price	R306 282 excl. VAT/R352 000 incl. VAT

Exterior colours



Creamy white

Interior trim




Vinyl-brown

Dimensions



Overall width
1 740 mm




Overall height
1 970 mm

Ground clearance
185 mm



1 235 mm , Wheel base 2 430 mm , 1 185 mm,
Overall length 4 850 mm

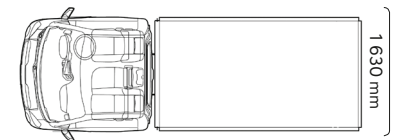

2 785 mm

1 630 mm